




ICE-75 Chiller Dimensions
15"h x 29"w x 21"d



Weight: ICE-75 3/4hp ----- 70#'s

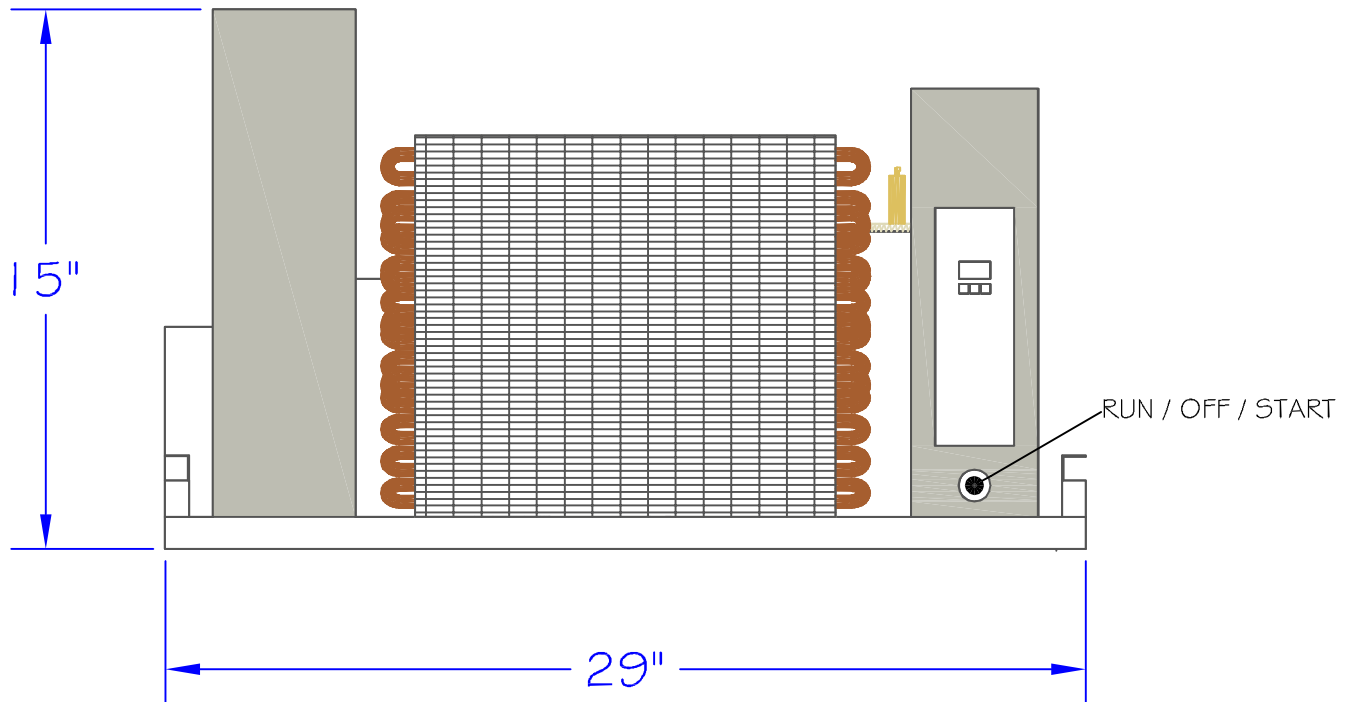

ICE-75 SPECIFICATIONS



ICE - 75

| | |
|-----------------------------|---|
| H.P. | 3/4 h.p. |
| BTU's | 4,088 |
| Amp | 5.6 |
| Weight | 70 pounds |
| Maximum Feet in System | 100' Remote |
| Refrigerant | 404A |
| Refrigerant Charge | 30 oz Field Adjusted |
| Refrigerant | 404A, txv, hermetic compressor with high & low access ports |
| Electrical | 230v / 20amp dedicated circuit |
| Plumbing | Water cooled units: use 3/8" inlet & outlet with compression fittings. Supply & return should have ball valves for serviceability. If condenser water is to be dumped then a drain needs to be within 6 feet of chiller location. |
| Dimensions | Height 15" - Width 29" - Depth 21" See line drawing |
| Installation | Installation required |
| Installation Kit | Available on request |
| Optional | Water cooled condenser |
| Dimensions with floor stand | Height 26" - Width 31" - Depth 22" |
| Stands | Chiller is available with wall mount stand. Floor stand must be specified. |

CHILL·RITE 32 MFG. P.O. BOX 5566 SLIDELL, LA 70469

800-256-2190 (985) 641-4865 FAX : (985) 641-0183

www.chillrite32.com